



# AV800

Edge AI Inference Tesla T4 &  
Xeon®D-2183IT



- Ultra-High Performance Intel® Xeon® D-2183IT (2.2GHz, 16 cores, 32 threads)
- NVIDIA TELSAs T4 GPU Integrated (2560 CUDA, 16GB GDDR6)
- DDR4-2666 MHz
- NVMe for Fast & Mass Storage
- MIL-STD-810 Temperature, Shock, Vibration, MIL-STD-810 Salt Fog
- MIL-STD 461 EMI/EMC; MIL-STD 1275



## Features

### Edge AI Inference, NVIDIA Tesla T4 & INTEL XEON D-2183IT

AV800 is 7STARLAKE ruggedized AI inference platform specifically designed for NVIDIA® Tesla T4 and supports Intel® XEON Skylake DE processor. Utilizing 7STARLAKE's Open Modular, Scalable Architecture, AV800 provide optimized cooling solution for Tesla T4, ensure the stable system operation in harsh environments. In addition to Tesla T4, AV800 provides one M.2 NVMe slot for fast storage access. Combining stunning inference performance, powerful CPU and expansion capability, it is the perfect ruggedized platform for versatile edge AI applications.

AV800 ruggedized AI inference platforms designed for advanced inference acceleration applications such as voice, video, image and recommendation services. It supports NVIDIA® Tesla T4 GPU, featuring 8.1 TFLOPS in FP32 and 130 TOPs in INT8 for real-time inference based on trained neural network model.



#### SPECIFICATIONS

|                             |   |
|-----------------------------|---|
| GPU Architecture            | <b>NVIDIA Turing</b>                    |
| NVIDIA Turing Tensor Cores  | <b>320</b>                              |
| NVIDIA CUDA® Cores          | <b>2,560</b>                            |
| Single-Precision            | <b>8.1 TFLOPS</b>                       |
| Mixed-Precision (FP16/FP32) | <b>65 TFLOPS</b>                        |
| INT8                        | <b>130 TOPS</b>                         |
| INT4                        | <b>260 TOPS</b>                         |
| GPU Memory                  | <b>16 GB GDDR6<br/>300 GB/sec</b>       |
| ECC                         | <b>Yes</b>                              |
| Interconnect Bandwidth      | <b>32 GB/sec</b>                        |
| System Interface            | <b>x16 PCIe Gen3</b>                    |
| Form Factor                 | <b>Low-Profile PCIe</b>                 |
| Thermal Solution            | <b>Passive</b>                          |
| Compute APIs                | <b>CUDA, NVIDIA TensorRT™,<br/>ONNX</b> |

## Features

# Ultra-High Performance Intel Xeon Performance with VMware Support



Skylake DE: The Intel® Xeon® processor D-2183IT product family is Intel's 64-bit system on a chip (SOC) and the first Intel® Xeon® SoC based on Intel\* 14 nm silicon technology. This lineup offers hardware and software scalability from two up to sixteen cores, making it the perfect choice for a broad range of high-performing, low-power solutions that will bring intelligence and Intel® Xeon® reliability, availability, and serviceability (RAS) to the edge. For applications where space is a premium, an integrated Platform Controller Hub (PCH) technology and Intel® Ethernet in a ball grid array (BGA) package offer an inspiring level of design simplicity. The Intel® Xeon® processor Skylake DE product family is offered with a seven-year extended supply life and 10-year reliability for Internet of Things designs.

## Design to Meet MIL-STD 810, MIL-STD 461

AV800 is designed to meet strict size, weight, and power (SWaP) requirements and to withstand harsh environments, including temperature extremes, shock/vibe, sand/dust, and salt/fog.

AV800 is MIL-461 EMI/EMC compliant rugged Edge AI Inference server. It passes numerous environmental tests including Temperature, Altitude, Shock, Vibration, Voltage Spikes, Electrostatic Discharge and more. The sealed compact chassis shields circuit cards from external environmental conditions such as sand, dust, and humidity.



# Specifications

## System

|             |  |
|-------------|--|
| Processor   | Intel® Xeon® Processor D-2183IT (Frequency 2.2GHz, Turbo Boost Frequency up to 3.0GHz), 16-Core, 32 Thread Support, 22MB Smart Cache |
| Memory type | 2 x DDR4 up to 64GB  |
| Chipset     | SoC, integrated with CPU   |

## GPU

|                      |                         |
|----------------------|-------------------------|
| NVIDIA               | TESLA T4                |
| Turning Tensor Cores | 320                     |
| CUDA Cores           | 2560                    |
| Memory               | 16 GB GDDR6, 300 GB/sec |

## Graphics Output

|            |                            |
|------------|----------------------------|
| 1xVGA      | ASPEED AST2500             |
| Resolution | Up to 1920x1200@60Hz 32bpp |

## Storage

|         |   |
|---------|---|
| HDD/SSD | 1x M.2 2280 M key NVMe socket (PCIe Gen3 x4) for NVMe SSD installation 2 x 2.5" SATA SSD (Easy Swappable) |
|---------|---|

## Side I/O

|                         |  |
|-------------------------|--|
| X1 (2 x 10GbE Ethernet) | 1x Amphenol TV07RW-13-35S (22PIN)                  |
| X2 (VGA)                | 1x Amphenol TV07RW-13-98S (10PIN) X3 (USB3.0x2)    |
| X3 (USB3.0x2)           | 1x Amphenol TV07RW-13-35SB (22PIN)                 |
| X4 (DC-IN)              | 1x Amphenol TV07RW-13-04P (4PIN)                   |
| Button                  | 1 x Power Switch with Dedicated LED                |
| SSD Tray                | 2 x Dual 2.5" HDD/SSD Easy Swap Tray Dedicated LED |
| Dedicated LED           | 1 x Red LED (OVHT) , 1 x Green LEDs (SSD)          |

## Power Requirement

|             |  |
|-------------|--|
| Power Input | DC-DC 18 to 36V (300W max) MIL-STD 461 |
|-------------|--|

## Applications, Operating System

|                  |  |
|------------------|--|
| Applications     | C4ISR, Commercial and Military Platforms Requiring Compliance to MIL-STD-810 Process Control, where Harsh Temperature, Shock, Vibration, Altitude, Dust and EMI Conditions   |
| Operating System | Windows 10 64Bit, Windows Server 2019 64bit, Windows 2016 64bit, Hyper-V Server 2016 R2, Ubuntu16.04.3 LTS/17.10/18.04.1LTS, Fedora 25/26, RedHat Linux EL 6.8/6.9/7.3/7.4/7.6, VMware ESXi 6.5u1, VMware ESXi 6.7U2 |

## Physical

|                    |   |
|--------------------|---|
| Dimension          | 405x 154 x316 mm(D x H x W)   |
| Weight             | 15Kg (33.06lbs)   |
| Chassis            | Aluminum Alloy, Corrosion Resistant   |
| Finish             | Anodic aluminum oxide   |
| Cooling            | Natural Passive Convection/Conduction Cooling. No Moving Parts Ingress Protection |
| Ingress Protection | IP65  |

## Environmental

### Operating Test MIL-STD-810

|                  |                             |   |
|------------------|-----------------------------|---|
| Low air pressure | Method 500.5<br>Procedure 2 | Operation/Air Carriage 4572m (15.000 ft)                          |
| Low Temperature  | Method 502.5<br>Procedure 2 | -20°C, 4 hours, ±3°C  |
| High Temperature | Method 501.5<br>Procedure 2 | +55°C, 4 hours, ±3°C  |
| Humidity         | Method 507.5                | 85%-95% RH without condensation, 24 hours/cycle, conduct 10 cycle |
| Vibration        | Method 514.6<br>Category 24 | 5-500Hz, Vertical 7.7Grms, 40mins x 3axis                         |
| Shock            | Method 516.6                | 20 Grms, 11ms, 3 axes   |

### Non-Operating Test MIL-STD-810

|                  |              |  |
|------------------|--------------|--|
| Low Temperature  | Method 502.5 | -33°C, 4 hours, change rate: ≤ 20°C/ Hour<br>-15°C, 72hours (By request) |
| High Temperature | Method 501.5 | +71°C, 4 hours, change rate: ≤ 20°C/ Hour                                |
|                  | Procedure 1  | +68°C, 240 hours (By request)  |
| Vibration        | Method 514.6 | 5-500Hz, Vertical 7.7Grms, 40mins x 3axis                                |

|          |              |                       |
|----------|--------------|-----------------------|
| Shock    | Method 516.6 | 20 Grms, 11ms, 3 axes |
| Salt Fog | Method 509.7 | Salt Spray (50±5)g/L  |





### MIL-STD 461

|  |                |       |  |
|--|----------------|-------|--|
| Conducted Emissions                            | CE102<br>curve | basic | 10kHz – 30MHz  |
| Power Leads                                    |                |       |  |
| Conducted Emissions                            | RE102-4        |       | 1.5MHz - 30MHz – 5GHz                                    |
| Electric Field                                 |                |       |  |
| Radiated Susceptibility                        | RS103          |       | 1.5 MHz – 3GHz, 50 V/m equal for all frequencies         |
|  |                |       | 2MHz – 80MHz, 50 V/m equal for all frequencies           |
| 80MHz – 3GHz, 50 V/m equal for all frequencies |                |       |  |
| 3GHz – 5GHz, 50 V/m equal for all frequencies  |                |       |  |
| Electric Field                                 |                |       |  |
| Electrostatic Discharge                        | EN 61000-4-2   |       | Air DISCHARGE: 8 Kv, Contact discharge : 6kV             |
| Electromagnetic compatibility                  | EN61000-4-4    |       | Signal and DC Net: 1 kV                                  |
| Electromagnetic compatibility                  | EN61000-4-5    |       | Lead vs. ground potential 1Kv, signal und DC Net: 1 kV   |
| Radio disturbance                              | EN55022        |       | Class A  |
| Electromagnetic compatibility                  | EN61000-4-3    |       | 10V/m  |
| Electromagnetic compatibility                  | EN 61000-4-5   |       | Lead vs. ground potential 1Kv, signal und DC Net: 0.5 kV |

### MIL-STD-1275 Specifications

|              |           |
|--------------|-----------|
| Steady State | 20V~33V   |
| Surge Low    | 20V~33V   |
| Surge High   | 18V/500ms |

## Appearance & Dimension

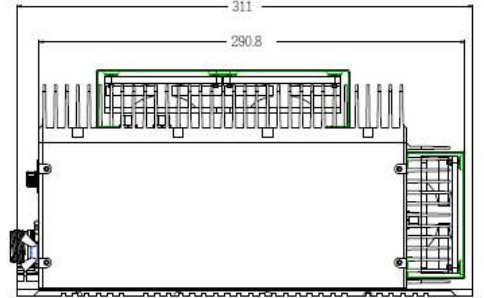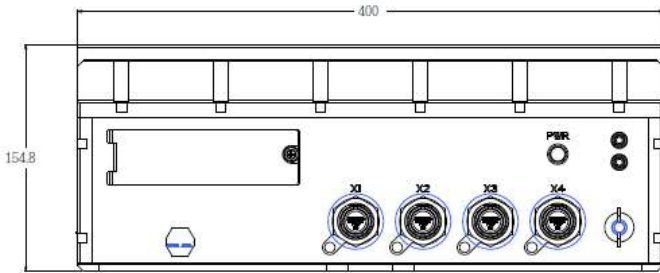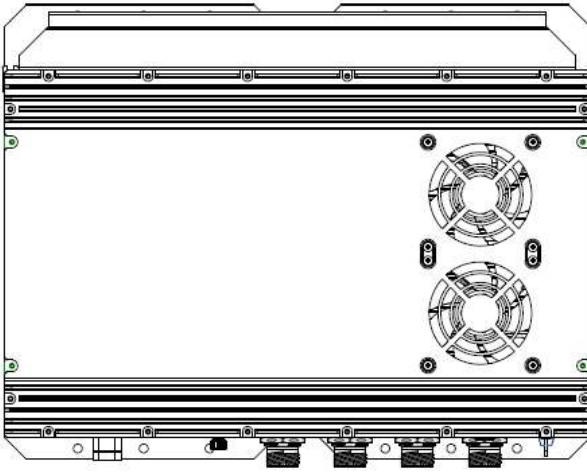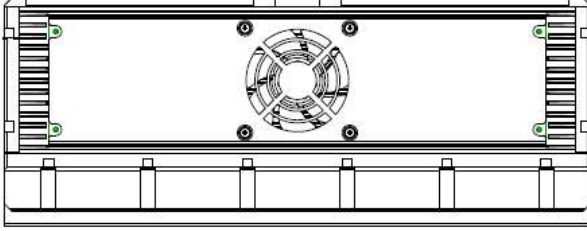

**NOYA**

**NOYA DİJİTAL DÖNÜŞÜM  
TEKNOLOJİLERİ A.Ş**

Hamidiye Mah. Soğuksu Caddesi  
No:5 Kat:8 34408 Kağıthane /  
İstanbul / Türkiye

☎ **0212 294 24 03**  
☎ **0850 399 66 92**

info@noyatech.com  
www.noyatech.com

**7STARLAKE**