

# Nuvo-9100VTC Series

Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12/ 4x RJ45 / 8x RJ45 PoE+ ports



## Key Features

- Supports Intel® 13th/12th-Gen Core™ 24C/ 32T 35W/ 65W LGA1700 CPU
- 4x or 8x 802.3at PoE+ ports via M12 or RJ45 connectors
- 1x USB 3.2 Gen2x2 type-C and 8x USB 3.2/ 2.0 type-A ports
- On-board isolated CAN bus for in-vehicle communication
- 4-CH isolated DI and 4-CH isolated DO
- M.2 Gen4 x4 NVMe SSD slot
- 8V to 48V wide-range DC input with built-in ignition power control
- 2x SATA ports with 1x hot-swappable HDD tray, supporting RAID 0/1
- E-Mark certified and EN 50155 EMC compliant



Contact Neosys

Get Quote

## Introduction

Nuvo-9100VTC is Neosys' latest rugged in-vehicle controller based on Intel® 13<sup>th</sup>/ 12<sup>th</sup>-Gen Core™ processors. Benefiting from cutting-edge Intel® 7 photolithography, the latest Core™ desktop processors come with up to 24 cores/ 32 threads, offering an incredible boost of computational performance. Combining DDR5 memory bandwidth throughput and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.


Nuvo-9100VTC provides flexibility to support a range of peripherals and connections. It has 2.5Gb and 1Gb Ethernet ports, and four or eight 802.3at PoE+ ports to supply 25W of power to connected devices such as IP cameras. The system also has x-coded M12 connectors and screw-lock mechanisms on the computer I/Os like Gigabit Ethernet, USB 3.2 Gen1 and USB 3.2 Gen2 to guarantee extreme rugged connectivity in shock/ vibration environments. Wireless connectivity is essential for modern-day in-vehicle applications, and you can simultaneously utilize two M.2 and three mini-PCIe sockets with corresponding wireless modules for 5G/ 4G, WiFi, GPS, and CAN module for communication.

On top of all that, Nuvo-9100VTC also features an isolated CAN bus for in-vehicle communication, isolated DIO for sensor/ actuator control, 8V to 48V wide-range DC input with ignition power control, and is E-Mark certified, making it the perfect solution with extraordinary reliability for various in-vehicle applications.


## Specifications

System Core		Expansion Bus	
Processor	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mini PCI Express	1x full-size mini-PCIe socket
	Support Intel® 12th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)		2x full-size mini-PCIe sockets (USB signals only) with internal SIM sockets
Chipset	- Intel® Core™ i9-13900E/ i9-13900TE	M.2	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module
	- Intel® Core™ i7-13700E/ i7-13700TE		1x M.2 2242/3052 B key socket with SIM slot for M.2 4G module
Graphics	- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE	<b>Power Supply</b>	
	- Intel® Core™ i3-13100E/ i3-13100TE	DC Input	1x 3-pin pluggable terminal block for 8V to 48V DC input (IGN/ GND/ V+)
Memory	Integrated Intel® UHD Graphics 770 (32EU)	Ignition Control	Built-in ignition power control
AMT	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	Remote Ctrl. & LED Output	1x 3-pin pluggable terminal block for remote control and PWR LED output
TPM	Supports Intel vPro/ AMT 16.0	<b>Mechanical</b>	
<b>I/O Interface</b>		Dimension	240 mm (W) x 225 mm (D) x 84 mm (H)
Ethernet port	1x 2.5G Ethernet by I225-IT and 1x Gigabit Ethernet by I219-LM with screw-lock	Weight	3.7kg
PoE+	4x IEEE 802.3at Gigabit PoE+ ports by Intel® I210	Mounting	Wall-mount with damping bracket
	- M12 X-coded connector (Nuvo-9100VTC)	<b>Environmental</b>	
USB 3.2	- RJ45 connector (Nuvo-9104VTC)	Operating Temperature	With 35W CPU
	4x IEEE 802.3at Gigabit PoE+ ports by Intel® I210 and 4x 2.5G PoE+ ports by I225-IT		-40°C – 70°C <sup>[1]</sup> (with 1 memory module installed)
USB 2.0	- RJ45 connector (Nuvo-9108VTC)	With 65W CPU	-40°C – 60°C <sup>[2][3]</sup> ((with 2 memory modules installed)
	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock	Storage Temperature	-40°C to 85°C
CAN Bus	4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors	Humidity	10% to 90% , non-condensing
	2x USB 3.2 Gen1x1 (5 Gbps) ports in type-A connectors	Vibration	EN 50155:2017/ IEC 61373, Category I, Class B - Body mounted
Video Port (Integrated Graphics)	2x USB 2.0 ports	Shock	EN 50155:2017/ IEC 61373, Category I, Class B - Body mounted
	1x isolated CAN 2.0 port	EMC	E-Mark, EN 50121 (EN 50155 EMC)
Serial Port	1x VGA, supporting 1920 x 1200 resolution		CE/FCC Class A, according to EN 55032 & EN 55035
	Isolated DIO	1x DVI-D, supporting 1920 x 1200 resolution	<small><sup>[1]</sup> Due to high heat generation of DDR5 memory, please configure the CPU to 35W mode and utilize only one memory slot, while operating at a temperature of 70°C.</small>
Audio		1x DisplayPort, supporting 4096 x 2304 resolution	<small><sup>[2]</sup> For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.</small>
	Storage Interface	2x software-programmable RS-232/ 422/ 485 ports (COM1/COM2)	<small><sup>[3]</sup> For CPU operating at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to allow higher operating temperature.</small>
SATA HDD		2x RS-232 ports (COM3/COM4)	
M.2	4-CH isolated DI and 4-CH isolated DO		
	1x 3.5 mm jack for mic-in and speaker-out		
SATA HDD	1x hot-swappable 2.5" HDD tray (7mm HDD/ SSD) and 1x internal 2.5" SATA ports		
M.2	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD		

## Appearance

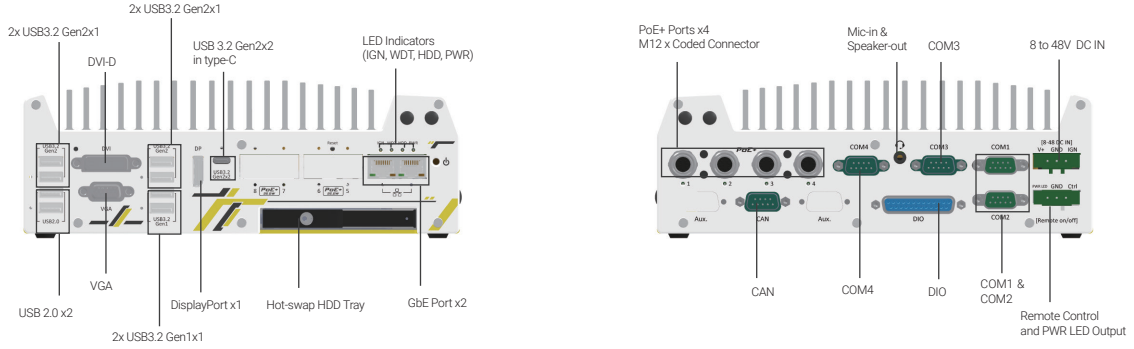

## Dimensions

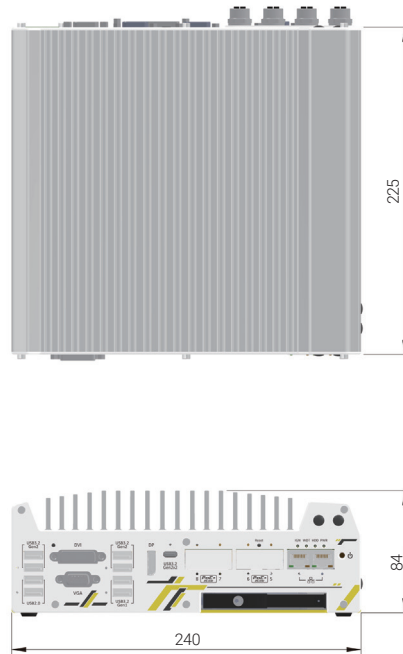

Unit : mm

## Ordering Information

Model No.	Product Description
Nuvo-9100VTC	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12 PoE+ Ports, DIO, CAN bus and RAID
Nuvo-9104VTC	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x RJ45 PoE+ Ports, DIO, CAN bus and RAID
Nuvo-9108VTC	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 8x RJ45 PoE+ Ports, DIO, CAN bus and RAID

## Optional Accessories

Cbl-M12X8M-RJ45F-100CM	M12 (8-pole-X-coded) to RJ45 Female, CAT6A, Length : 100CM
Cbl-M12X8M-RJ45-CAT6A-500CM	M12 (8-pole-X-coded) to RJ45, CAT6A, Length : 500CM
PA-280W-ET2	280W AC/DC power adapter 24V/ 11.67A ; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C.

# NOYA

NOYA DİJİTAL DÖNÜŞÜM  
TEKNOLOJİLERİ A.Ş.

Hamidiye Mah. Soğuksu Caddesi  
No:5 Kat:8 34408 Kağıthane /  
İstanbul / Türkiye

☎ 0212 294 24 03  
☎ 0850 399 66 92

info@noyatech.com  
www.noyatech.com